

ARTEMIS Series



LED PANEL ROUND - SLIM SERIES



Color-temperature contrast of LED panel lights

Cool White 5000K-6000K	Bright White (Clear LED light Panel) 4000K-4500K	Warm White 2800K-3300K



The Artemis LED Panel Lights Series are suitable for all office, residential, and hospitality applications that require diffuse overhead lighting with dimming compatibility. Unlike fluorescent light tubes, LED panels are flicker-free and provide reliable and consistent light levels at 50,000 hours of operation.

The Artemis Series are available in many different power ratings and sizes, thus offering the perfect solution to your office lighting needs.

Output & CCT adjustable on certain models.



NOTES: Specifications and dimensions are subject to change without notice.
Visit us at www.lumingen.com
Office Telephone: 1.604.371.4112


January 24, 2021

Specifications

Model	ART-P5-0009-120	ART-P5-0015-120	ART-P5-0018-120	ART-P5-0025-120
Lumen Output	+720 lm	+1200 lm	+1440 lm	+1920 lm
Wattage	9 W	15 W	18 W	24 W
Efficacy	≥80 lm/W	≥80 lm/W	≥80 lm/W	≥80 lm/W
Voltage	AC90-130V	AC90-130V	AC90-130V	AC90-130V
RA	> 80	> 80	> 80	> 80
Beam Angel	120°	120°	120°	120°
Available Color Temp.	3000K/4000K/5000K CCT Tunable	3000K/4000K/5000K CCT Tunable	3000K~5000K Optional	3000K~5000K Optional
L70	50,000 h	50,000 h	50,000 h	50,000 h
Weight	0.37 kg	0.42 kg	0.55 kg	0.68 kg
Dimensions	4 inches Φ120*H12mm Cut: Φ105mm	6 inches Φ170*H12 Cut: Φ155	8 inches Φ225*H12mm Cut: Φ205mm	11 inches Φ300*H12 Cut: Φ280
IP Rating	IP30	IP30	IP30	IP30
Material	Aluminum	Aluminum	Aluminum	Aluminum
Temp Range	-10°C~50°C	-10°C~50°C	-10°C~50°C	-10°C~50°C
Power Factor	> 90	> 90	> 90	> 90
Dimmable	Triac Dimming	Triac Dimming	Triac Dimming	Triac Dimming
Warranty	5 years	5 years	5 years	5 years



Installations

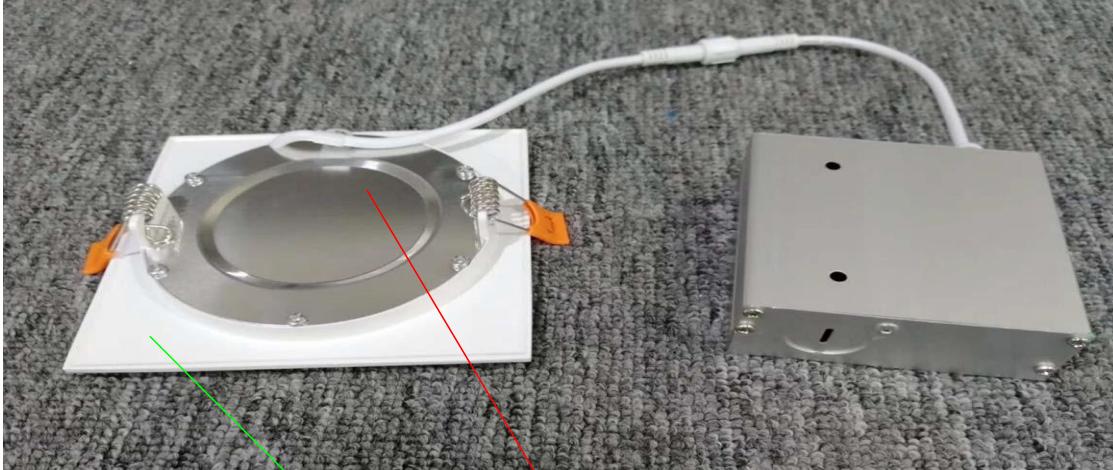

The back side is Round, so suitable for the exist round installed hole.

The front side is square. So it can Satisfy who want square shape panel light but with the old exist round installed hole.