

Installation Instructions

Hazardous location light (EAG-EX)

Important

READ INSTRUCTIONS CAREFULLY BEFORE INSTALLING. KEEP THIS INSTRUCTIONS FOR FUTURE REFERENCE.

Fixtures must be wired in accordance with the National electrical code and all applicable local codes. Proper grounding is required for safety.

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A QUALIFIED ELECTRICIAN WHO IS FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

Warning: Risk of fire or electric shock. High bay Light installation requires knowledge of luminaires and electrical systems. If not qualified, DO NOT try to install. Please contact an electrician.

Warning: Risk of fire or electric shock. Suitable for wet locations. Make sure the power is off premier to install.

Warning: Risk of fire or electric shock. Suitable for non-insulated surface and frame. DO NOT cover fixture with insulation liner or similar material.


Warning: DO NOT install in unstable, loose or breakable surfaces.

Warning: DO NOT let objects impact or exert force on the surface of the fixture.

Installation Steps (For Class I Div. 2 Group A, B, C, D locations)



⚠ WARNING
Risk of fire, Electric shock or personal injury
Before installation, turn off power!

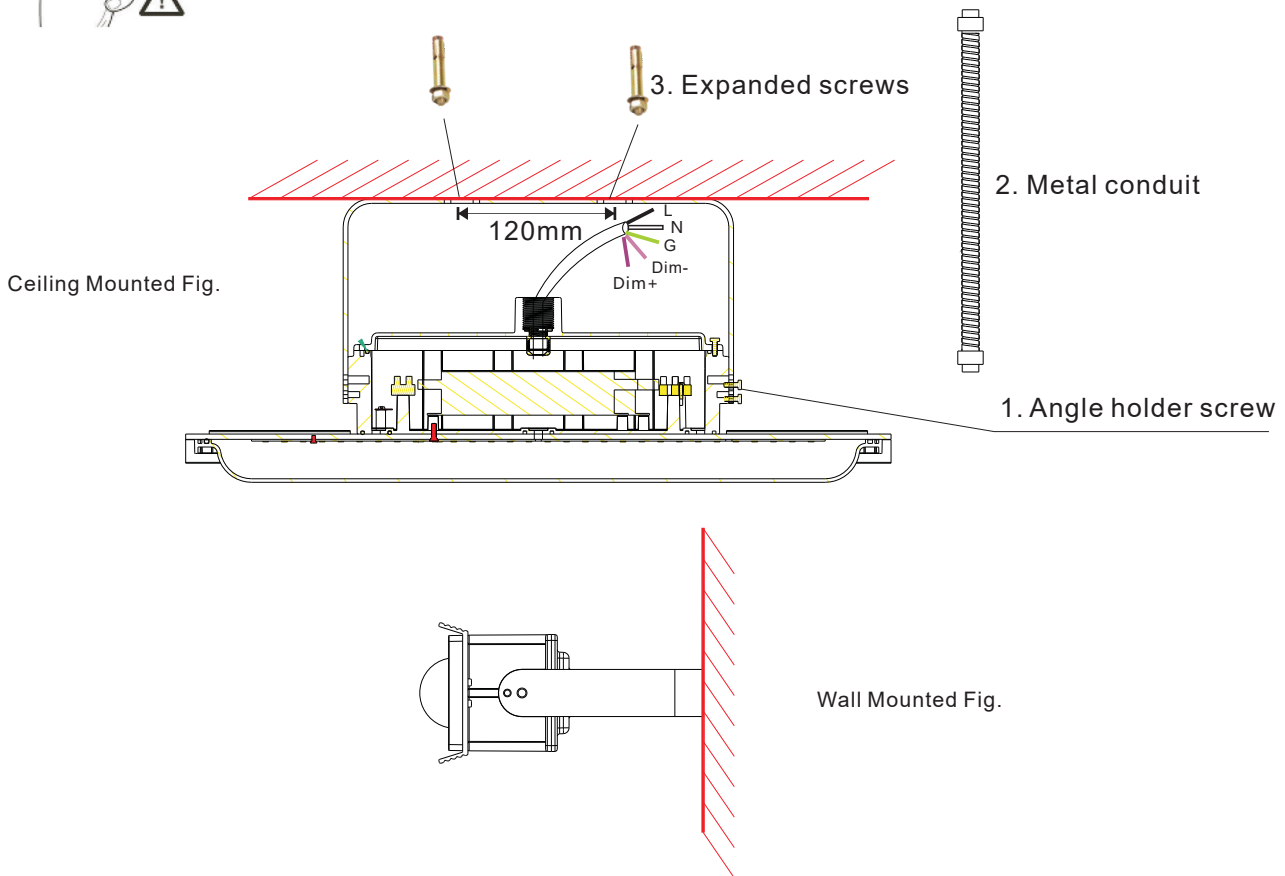

Description

1. Take the fixture and accessory out from cartoon box, tighten 2x angle holder screws.

3. Drill 2x 10mm hole as the distance 120mm, fixing $\varnothing 10$ expanded screws and bracket on ceiling.

2. Through the cable to flexible metal conduit and tighten it with the fixture.

4. Connect the AC cable, Black cable connect to Live wire, white cable connect to Null wire, green cable connect to grounding. Optional: Purple connect to Dim+, Pink connect to Dim-.