

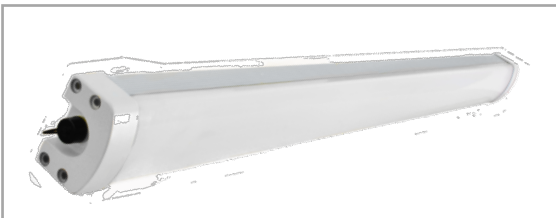


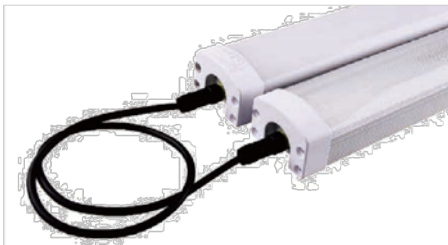

MARICI-TP Linear Lighting Series

Water-Proof LED Lighting Systems

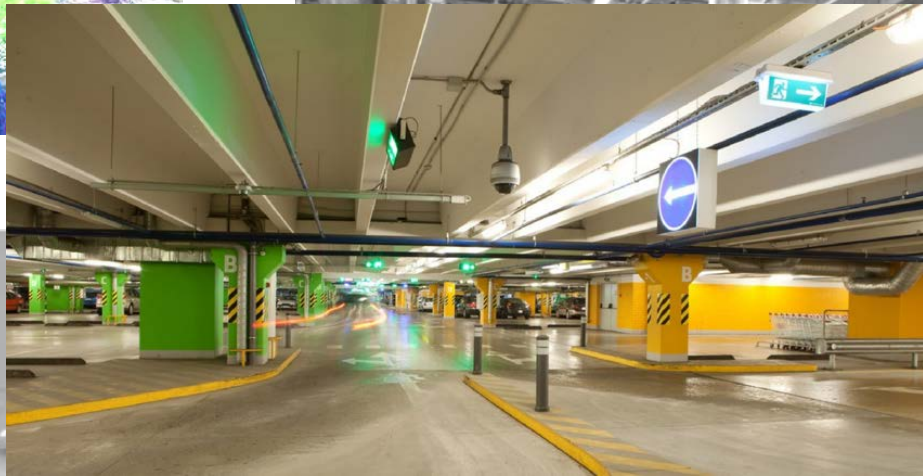

The MARICI-TP linear luminaire series is designed for applications that desire robust, compact, water-proof lighting. It is rated IP66, which is defined for continual operation in extremely dusty and wet environments with minimal losses in performance and practically no decrease in lifespan or reliability. The fixture housing can also withstand stress and impact wear, which allows the fixture to be used in harsh environments or areas that may direct low pressure water spray at the fixture.

Lumingen Technologies, Ltd.

Specs subject to change without notice. February 4, 2020

MARICI-TP Linear Lighting Series

MAR-TP-XXXX Specifications

Listing: cETLus Certified. E.Catalog Listed.

Available CRI: ≥80

Colour Temperature (CCT): 3000-5700 K

Expected L70 Lifespan: over 50,000 hours

Input Line Voltage: 120/277 VAC, 347 VAC; 50/60 Hz

Operating Temperature: -10°C to +40°C

Housing: Light-weight aluminum extrusion; High-grade plastic endcaps; Designed for environmental ruggedness.

Major Feature: IP66 ingress protection; designed to withstand stress and wear; linear design, easy surface mounted installation.

Lens: shatter/impact-resistant polycarbonate lens; clear or frosted

Standard Weight: 1.8 kg – 4.1 kg [2.4 lb. – 9.1 lb.]

Installation: Installed by brackets (ceiling, wall, etc.)

Warranty: 5 years

Specification Table

| Model | Size (mm) | Light Output ¹ (lm) | Wattage (W) | Input Voltage (VAC) |
|-------------|----------------|--------------------------------|-------------|---------------------|
| MAR-TP-0030 | 628 x 90 x 62 | 3,900 | 30 | 120/277, 347 |
| MAR-TP-0040 | 900 x 90 x 62 | 5,200 | 40 | 120/277, 347 |
| MAR-TP-0060 | 1200 x 90 x 62 | 7,800 | 60 | 120/277, 347 |
| MAR-TP-0080 | 1500 x 90 x 62 | 10,400 | 80 | 120/277 |

Ordering Code

| LAMP TYPE | PANEL SIZE | POWER RATING ² | AC INPUT VOLTAGE ² | CCT | CRI | [NULL] | INSTALL METHOD | LENS | [NULL] | [NULL] |
|-----------|-------------------------------------|------------------------------------------------------|-------------------------------|------------------------------------------------------------------|-----|--------|------------------------|----------------------------|--------|--------|
| MAR | TP | 0060 | 277 | 5K0 | 80 | 120 | S F | F R | 00 | X |
| MAR | TP <i>(Weather-proof Series)</i> | 0030 (30W) 0040 (40W) 0060 (60W) 0080 (80W) | 277 (120~277V) 347 (347V) | 3 K 0 (3000K) 4 K 0 (4000K) 5 K 0 (5000K) 5 K 7 (5700K) | 80 | 120 | S F (Surface, Ceiling) | CL (Clear) FR (Diffuse) | 00 | X |

¹Luminance Variation depends on selected Color Temperature (CCT) and lens diffusivity choice

²347 VAC not available for 80W models

